

Attenuators

Product Information

Issue Date: 2002/01



Over 200mw attenuation values
 Dual windows & Broadband(From 1270 to 1630nm)
 Bi-directional

FEATURES

- Absorption by metal-ion doped fiber
- Wide band
- Stable performance
- Low polarization dependence
- Low attenuation error and high return loss
- Bellcore standard (GR-910-core) conformed

APPLICATIONS

- Telecommunication
- CATV
- DWDM Multi-channel
- Optical Amplifier
- LAN(Local area network)
- FTTD(Fiber to the desk)
- FTTH(Fiber to the home)
- Fiber optic sensor
- Test equipment

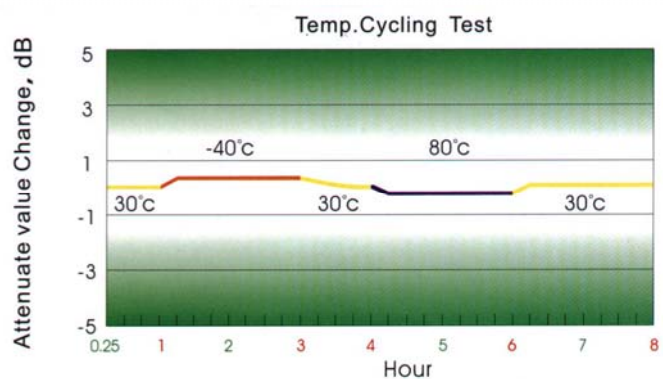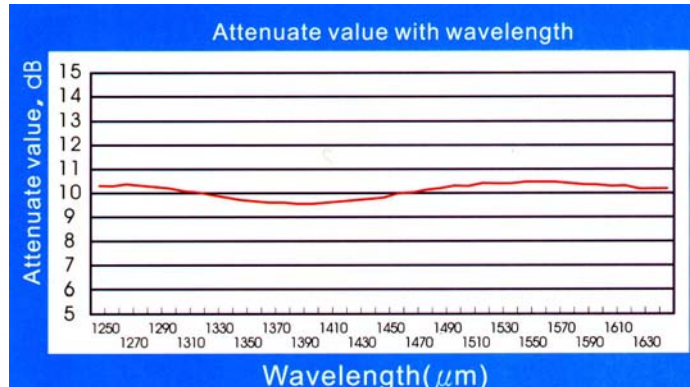


SPECIFICATIONS

Attenuation value	Error	Return Loss (dB)			Connector Type
		PC	UPC	APC	
Below 10 dB	± 0.1 A*	≥ 40	≥ 50	≥ 60	FC , SC , etc.
10~30 dB	± 1.5 dB	≥ 40	≥ 50	≥ 60	FC , SC , etc.

ORDERING INFORMATION

AT---B---LL---CC---N---XX/XX

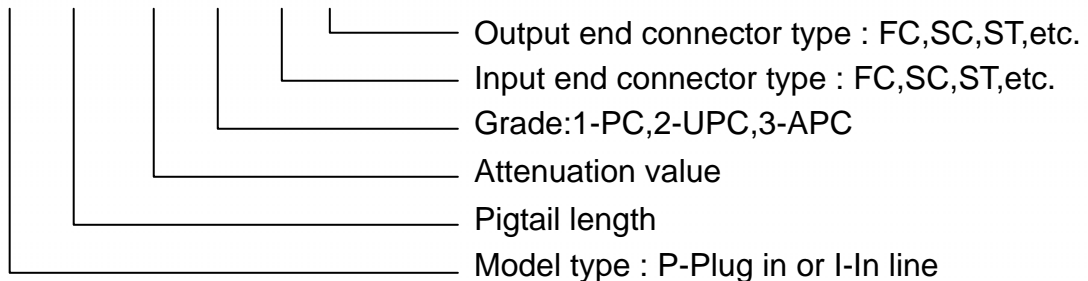

Prime Optical Fiber Corporation
 No.11, Ke Jung Rd.
 Science-Based Industrial Park
 Chu-Nan, 350, Miao-Li County, Taiwan, R.O.C.
 Tel: 886-37-586999 Fax: 886-37-586899
 E-mail: sales@pofc.com.tw

