

Jumpers(Patchcords and Pigtails) *Product Information*

Issue Date: 2006/05

FEATURES

- Low insertion loss
- High return loss
- Environmentally stable and reliable
- Precise dimension
- Excellent mechanical performance
- Wide band
- Stable performance
- Low polarization dependence
- Low attenuation error and high return loss
- Bellcore standard (GR-910-core) conformed



APPLICATIONS


- Telecommunication
- LAN(Local area network)
- FTTH(Fiber to the home)
- Fiber optic sensing
- Testing instrument
- CATV

SPECIFICATIONS

		<i>PC</i>	<i>UPC</i>	<i>APC</i>
Insertion Loss (dB)	SM	<0.20	<0.15	<0.20
	MM	<0.30	<0.20	<0.30
Return Loss (dB)		≥ 45	≥ 55	≥ 65
Operation temperature (°C)		-45 ~ +75		
Storage temperature (°C)		-55 ~ +85		

ORDERING INFORMATION

PA-SM-LL-C-N-1XX/XXX-1XX/XXX

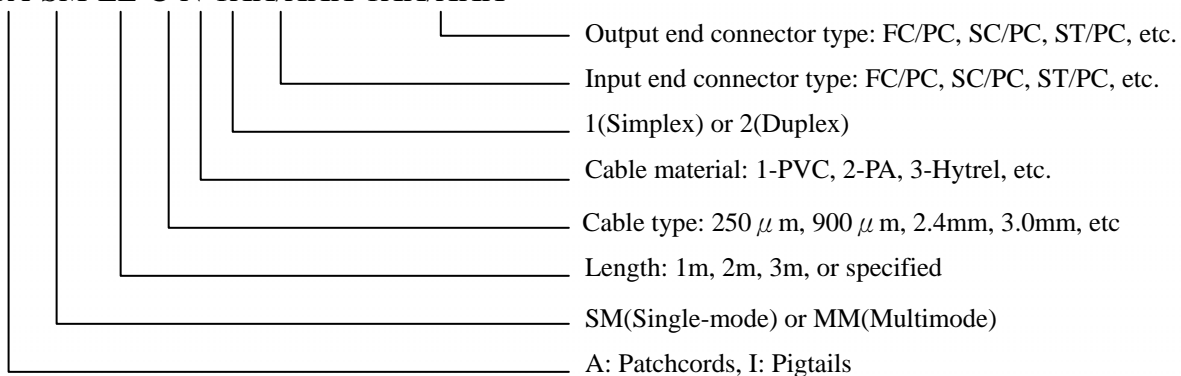

Prime Optical Fiber Corporation

No.11, Ke Jung Rd.
 Science-Based Industrial Park
 Chu-Nan, 350, Miao-Li County, Taiwan, R.O.C.
 Tel: 886-37-586999 Fax: 886-37-586899
 E-mail: sales@pofc.com.tw

